

Lower and Upper Coast Channels - Deep and Shallow Draft

Paula Rankin Wise

Operations Manager

Navigation Branch

28 Oct 2010

Galveston District – 2010 Dredging Conference

Custodians of the Coast




®

US Army Corps of Engineers
BUILDING STRONG®



Lower and Upper Coast Channels - Deep and Shallow Draft

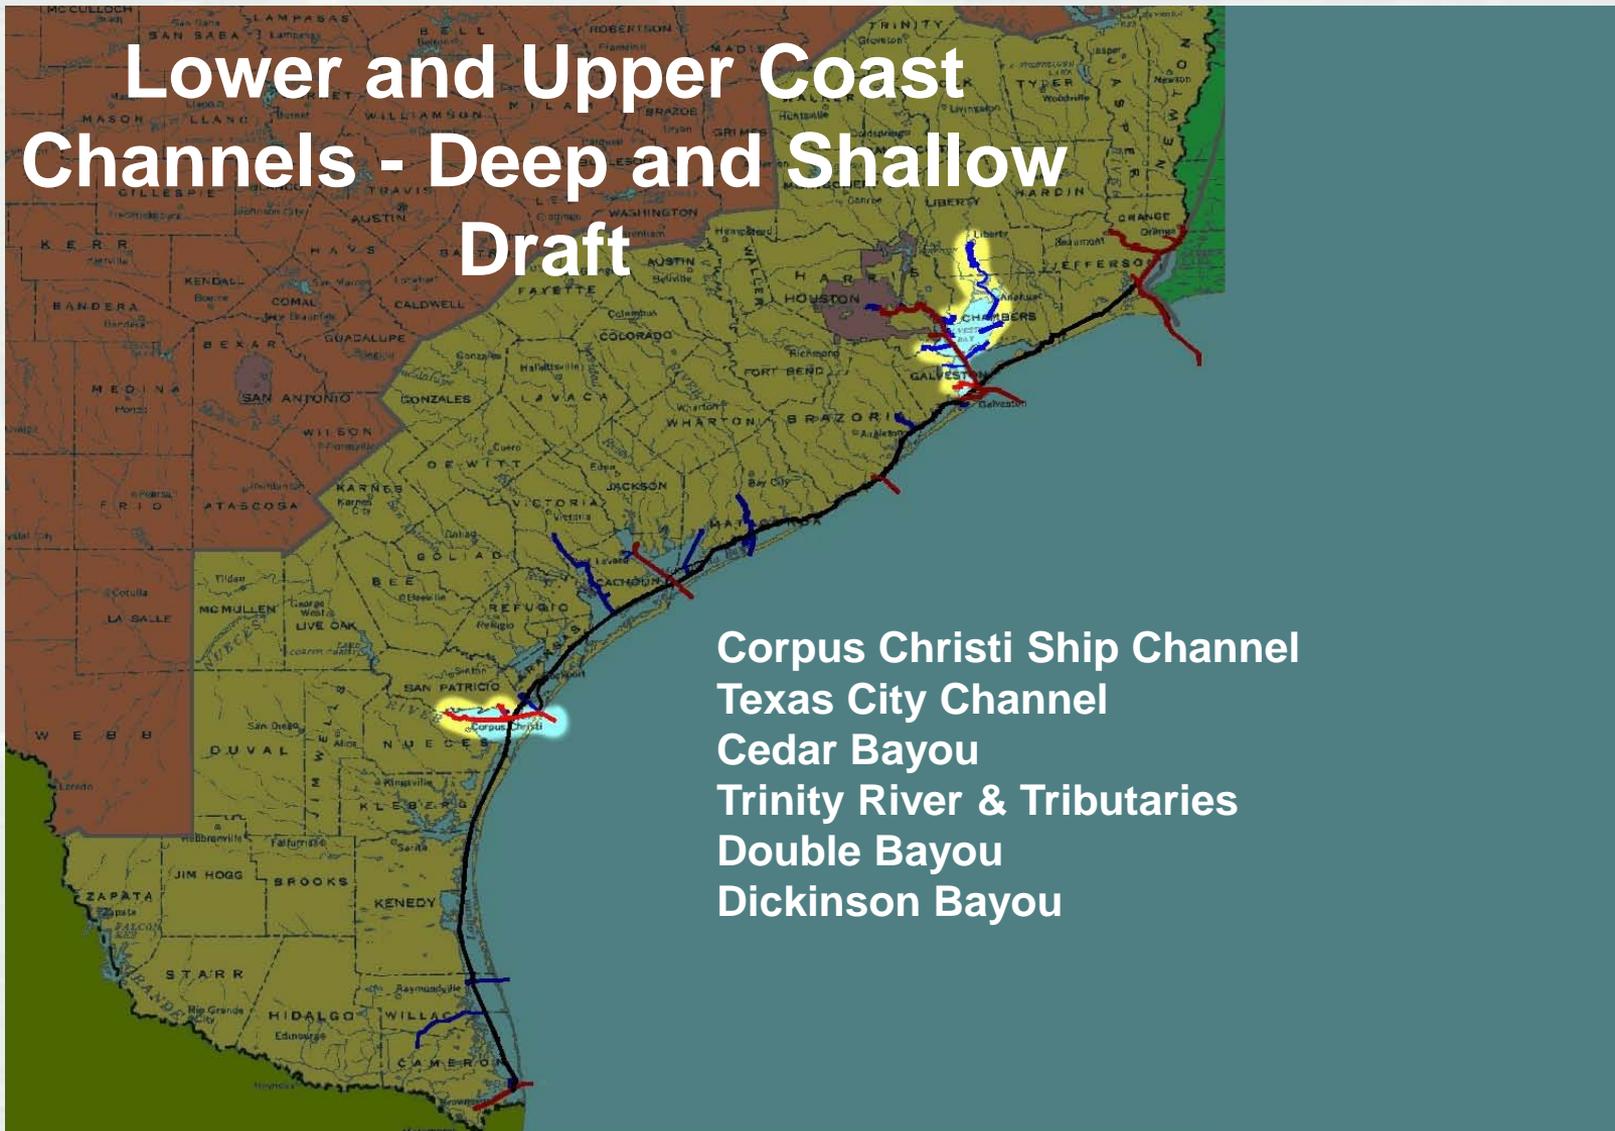

Corpus Christi Ship Channel
Texas City Channel
Cedar Bayou
Trinity River & Tributaries
Double Bayou
Dickinson Bayou



FY 2011

Projects

Galveston District – 2010 Dredging Conference

Custodians of the Coast



BUILDING STRONG®

FY	Project	OPM	Quan	Drg. Type	Adv	Bids	Award	Dredging Start	Dredging End
2011	CORPUS CHRISTI SHIP CHANNEL, TX Inner Basin to Main Turning Basin	Paula R. Wise 409-766-3948	900,000	Pipeline	6-Dec-10	5-Jan-10	21-Jan-11	11-Feb-11	30-Jul-11
2011	TEXAS CITY SHIP CHANNEL DAMP of Placement Area 5/6	Paula R. Wise 409-766-3948	NA	NA	15-Jun-11	29-Jul-11	13-Sep-11	NA	NA
2011	TEXAS CITY SHIP CHANNEL Industrial Canal and Turning Basin	Paula R. Wise 409-766-3948	200,000	Pipeline	15-Jul-11	16-Aug-11	8-Sep-11	1-Oct-11	1-Jan-12
2011	CORPUS CHRISTI SHIP CHANNEL, TX Repair Cell A Levee Damages	Paula R. Wise 409-766-3948	NA	NA					
2011	DOUBLE BAYOU, TX Dredge Channel to Project and Advance Maintenance Depths	Paula R. Wise 409-766-3948	1,700,000	Pipeline					
2011	TRINITY RIVER TRIBUTARIES, TX Dredge Channel to Smith Point	Paula R. Wise 409-766-3948	1,300,000	Pipeline					



Corpus Christi Ship Channel

Inner Basin to Main Turning Basin




- **Type of Work:** Maintenance Dredging
- **Depth:** 45'
- **Quantity:** 900,000 CY
- **Material Type:** Silt/Sand
- **Placement Plan:** Open Water and Upland PAs
- **Avg. Distance to PA:** 1 Mile
- **Equipment Type:** Pipeline Dredge
- **Small Business Set Aside:** NA
- **Advertise:** 6 DEC 2010



Texas City Channel

PA 5/6 Access Road, Channel Leveling and Clamshell Dredging

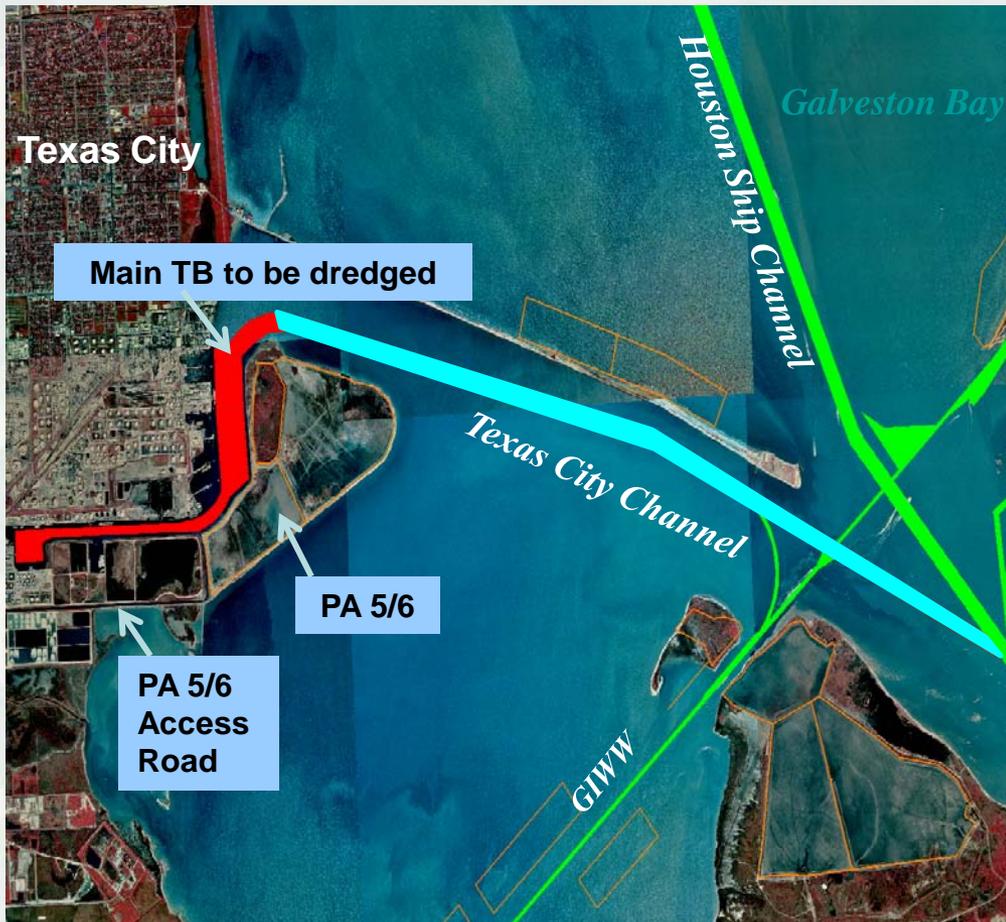


- **Type of Work:** Road Repair and Mechanical Dredging
- **Quantity:** NA
- **Material Type:** Silt/Sand
- **Equipment Type:** Construction and Mechanical Dredging
- **Small Business Set Aside:** Yes
- **Advertised:** 07 SEP 2010 (A)
- **Bid Opening –** 13 OCT 2010 (A)



Texas City Channel

Industrial Canal & Turning Basin

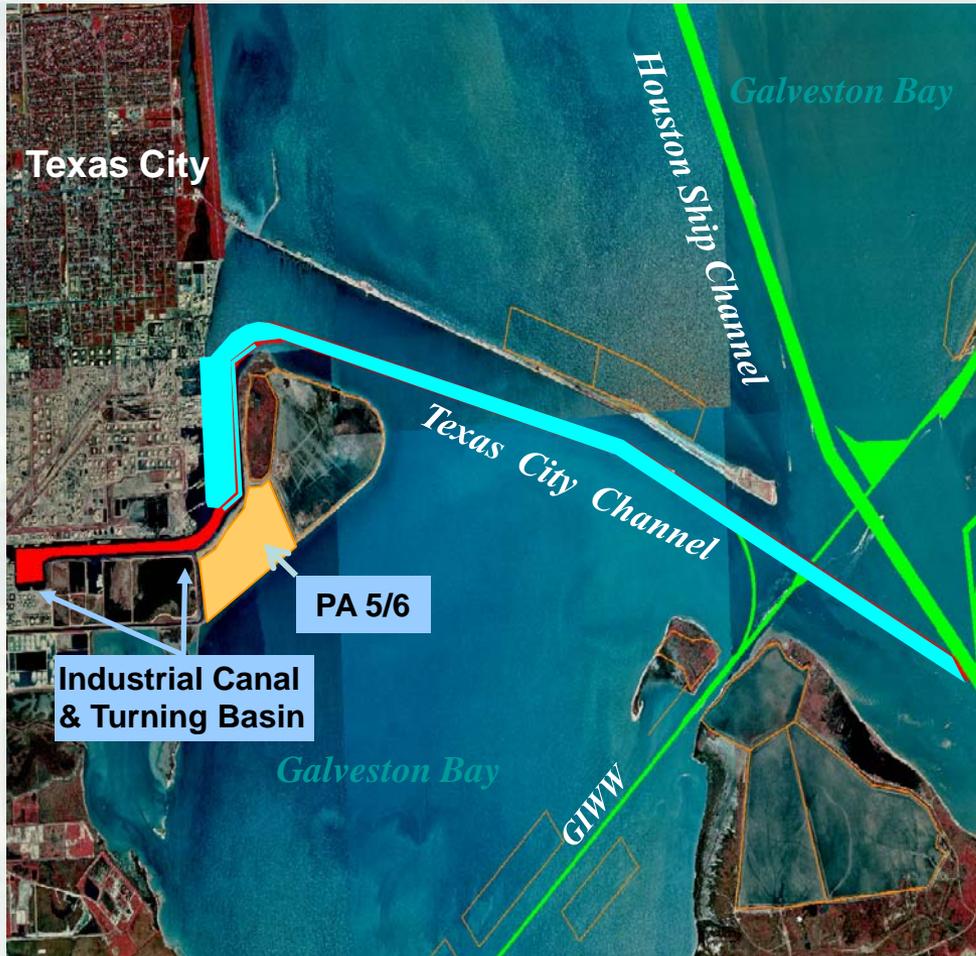

- **Type of Work:** Maintenance Dredging
- **Depth:** 45'
- **Quantity:** 200,000 CY
- **Material Type:** Silt/Sand
- **Placement Plan:** PA 5 & 6
- **Avg. Distance to PA:** 1 Mile
- **Equipment Type:** Pipeline Dredge
- **Small Business Set Aside:** NA
- **Advertise:** 15 JUL 2011



Texas City Channel

DAMP of Placement Area 5/6



- **Type of Work:** Dredge Area Management Practices
- **Quantity:** NA
- **Material Type:** Silt/Sand
- **Equipment Type:** Dragline / marsh backhoe
- **Small Business Set Aside:** Yes
- **Advertise:** 15 JUN 2011



FY 2012

Planned Requirements

Galveston District – 2010 Dredging Conference

Custodians of the Coast



BUILDING STRONG®

FY	Project	OPM	Quan	Drg. Type	Adv
2012	CEDAR BAYOU DAMP PA 6 (Snoopy)	Paula R. Wise 409-766-3948	NA	NA	3-Mar-12
2012	CORPUS CHRISTI SHIP CHANNEL, TX Entrance and Jetty Channel	Paula R. Wise 409-766-3948	900,000	Hopper	16-Sep-11
2012	CORPUS CHRISTI SHIP CHANNEL, TX Placement Areas No. 6 and 10 Levee Rehab	Paula R. Wise 409-766-3948	NA	NA	27-Apr-12
2012	TEXAS CITY SHIP CHANNEL, TX Texas City Main Channel and Turning Basin	Paula R. Wise 409-766-3948	2,600,000	Pipeline	3-Aug-11
2012	TRINITY RIVER & TRIBUTARIES, TX. Channel to Anahuac	Paula R. Wise 409-766-3948	300,000	Pipeline	15-Feb-12
2012	TRINITY RIVER AND TRIBUTARIES, TX Dredge Channel to Smith Point	Paula R. Wise 409-766-3948	1,300,000	Pipeline	7-Jul-12




Corpus Christi Ship Channel Entrance / Jetty Channel



- **Type of Work:** Maintenance Dredging
- **Depth:** 45'
- **Quantity:** 900,000 CY
- **Material Type:** Silt/Sand
- **Placement Plan:** Open Water
- **Avg. Distance to PA:** 2.5 Miles
- **Equipment Type:** Hopper Dredge
- **Small Business Set Aside:** No
- **Advertise:** 16 SEP 2011



Texas City Ship Channel Main Channel and Turning Basin

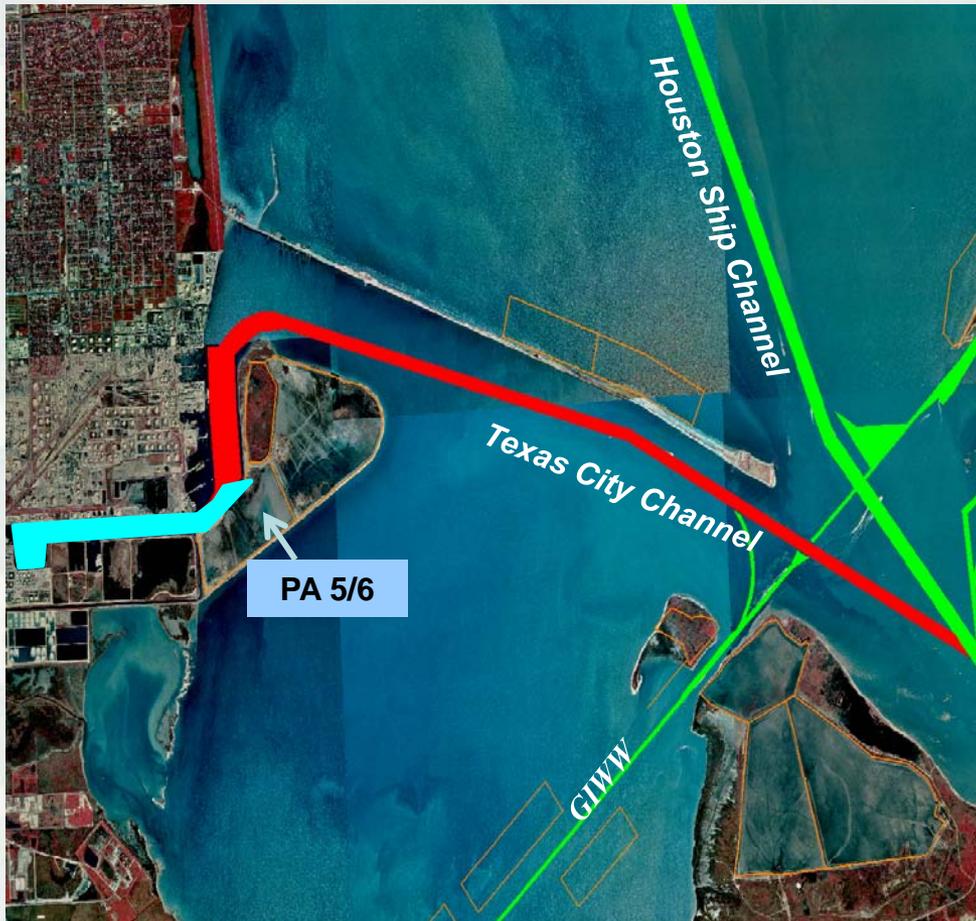

- **Type of Work:** Maintenance Dredging
- **Depth:** 45'
- **Quantity:** 2,600,000 CY
- **Material Type:** Silt/Sand
- **Placement Plan:** PA 5/6
- **Avg. Distance to PA:** 1 Mile
- **Equipment Type:** Pipeline Dredging
- **Small Business Set Aside:** NA
- **Advertise:** 03 AUG 2011



Cedar Bayou

DAMP Placement Area No. 6



- Type of Work:** Dredge Area Management Practices
- Quantity:** NA
- Material Type:** Silt/Sand
- Equipment Type:** Dragline / marsh backhoe
- Small Business Set Aside:** Yes
- Advertise:** 03 MAR 2012



Questions Comments?



For more information, contact:

**Paula Rankin Wise
Operations Manager**

**Navigation Branch, Operations Division
U.S. Army Corps of Engineers, Galveston
409-766-3948
paula.r.wise@usace.army.mil**

